


Western BUILDING SUPPLY

Installation Guide



FASTENER SEAL

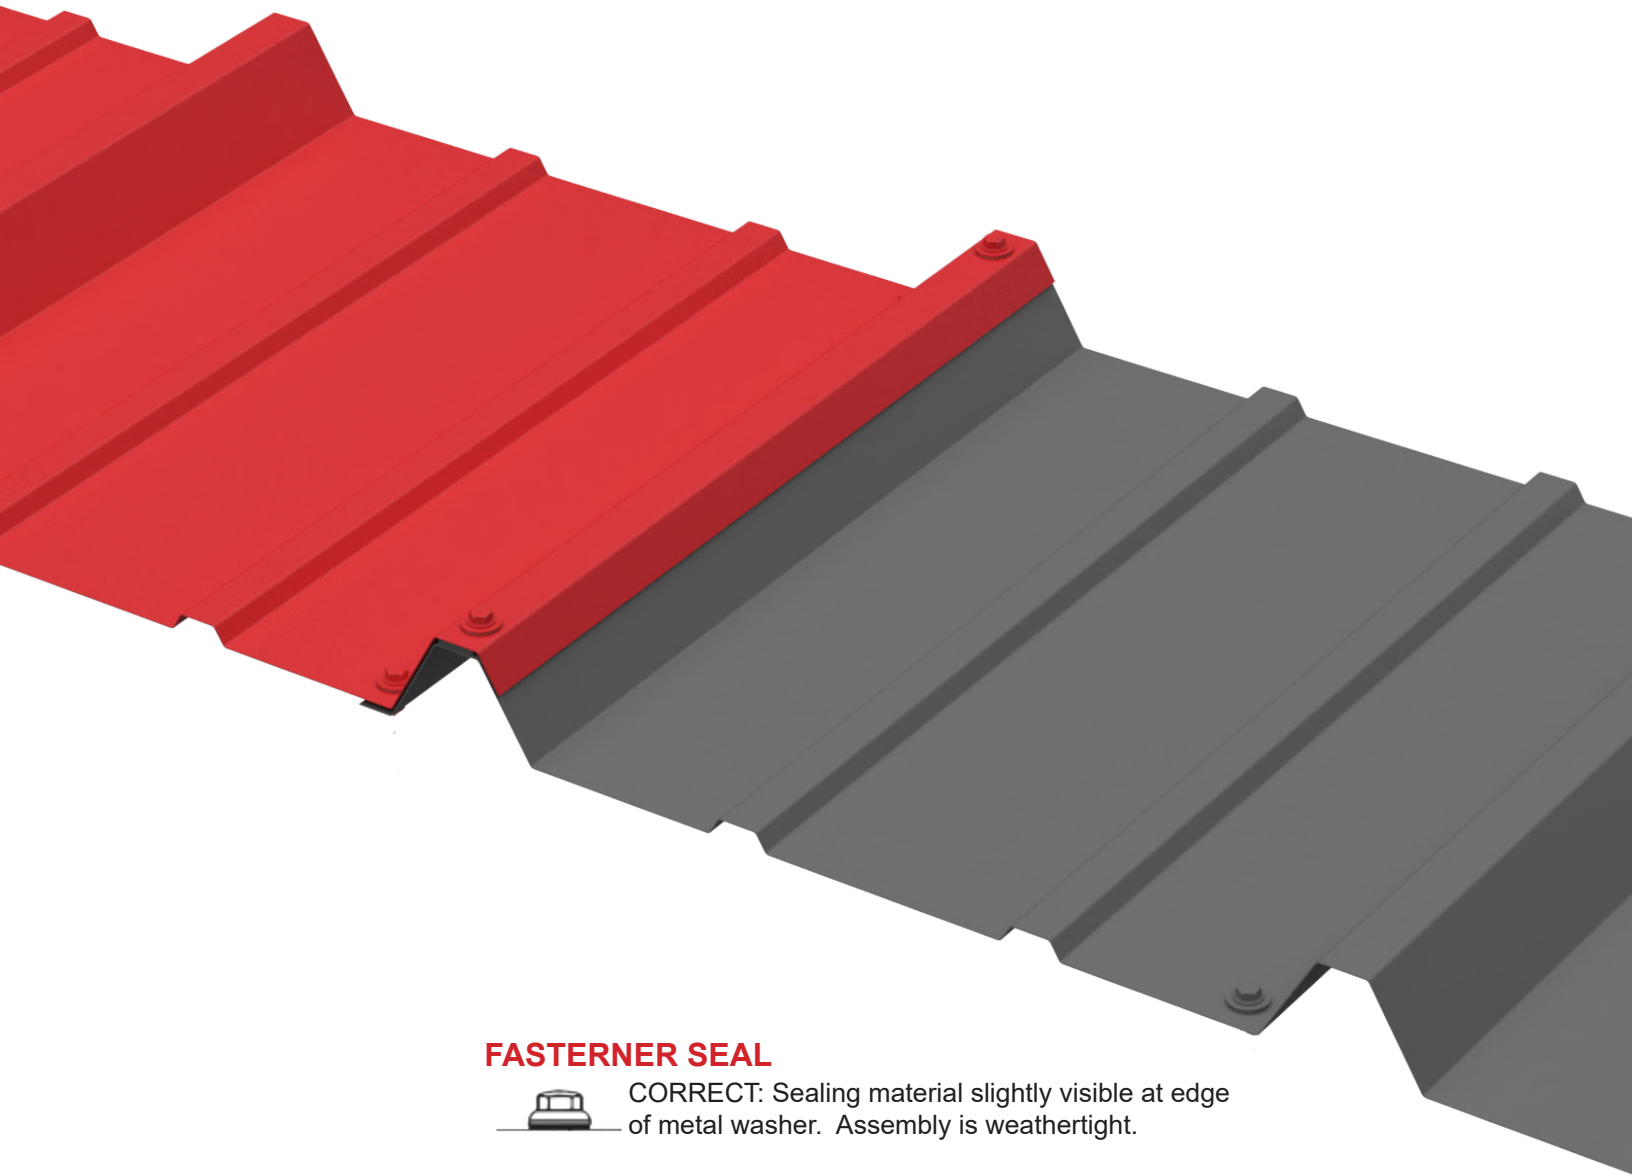

CORRECT: Sealing material slightly visible at edge of metal washer. Assembly is weathertight.



TOO LOOSE: Sealing material not visible. Not enough compression to seal properly.



TOO TIGHT: Sealing material extruded beyond edge of washer.

Western BUILDING SUPPLY

307.322.2888
www.westernbuildingsupplyllc.com
sales@wbswyo.com

